

Step 1. Find a suitable location

Open the package and pick up the Easy Solar Kit by the notches around the base plate. Find a suitable location and put down the Easy Solar Kit lightly.

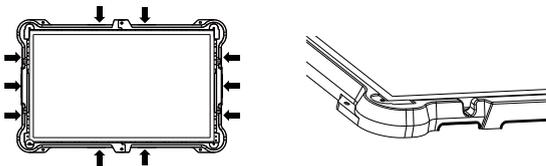


Figure Notches around the base plate



CAUTION Please put the Easy Solar Kit on a flat and non-shadow location.



CAUTION Easy Solar Kit has a 2.1m end cable and should be set near the socket. Or use the expansion cable as shown in Step 5.

Step 2. Open the solar panel lock

There are two solar panel locks on the base plate. Rotate and open the solar panel lock.




Figure Solar panel lock

Step 3. Prop up the bracket

Lift up the solar panel at the notches near the solar panel lock.

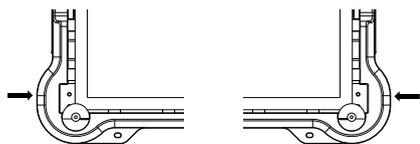


Figure Notches near the solar panel lock

Prop up the bracket and fixed it in groove.

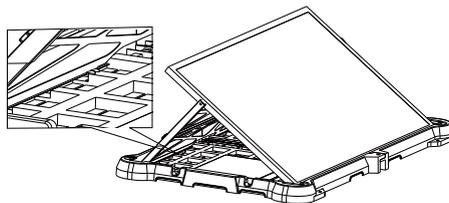


Figure Groove on the base plate



WARNING

The bracket must be fixed in the groove of the base plate, which will promote the wind loading rating of Easy Solar Kit.

Step 4. Adjust the direction and angle

Pick up the base plate and adjust the direction. Make the solar panel facing the sun light.



CAUTION

Please adjust the direction at noon to get a better electric energy production during the day time.

There are two angle locks on the bracket. Adjust these two angle locks at the same time.

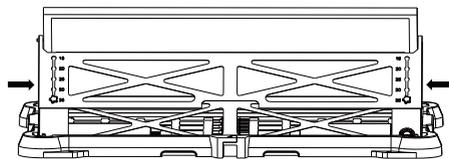


Figure Angle lock on the bracket

Lift the solar panel by one hand and use another hand to rotate the angle lock in counterclockwise direction. Slowly put down the solar panel and make the angle lock slip into the right angle. Rotate the angle lock in clockwise direction and tighten the angle lock.

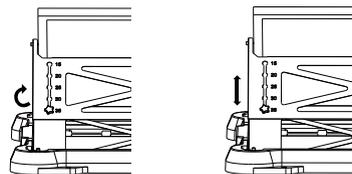


Figure Adjust the angle lock



CAUTION

Recommended angle parameters can be found in the appendix table.

Step 5. Extend the end cable (optional)

Extension cable (TSOL-MC200-G2, 2 m) can be used to extend the end cable.

Dismantle the end cable.




Figure Dismantle the end cable

Connect the two sides of extension cable to the microinverter and the end cable.




Figure Connect the extension cable

Step 6. Put weights on the base plate

Put weights (Brick, Stone etc.) on the base plate to promote the wind loading rating of Easy Solar Kit.




Figure weights on the base plate



CAUTION

Weights (Brick, Stone etc.) should be more than 20kg.

Step 7. Connect more Easy Solar Kit (optional)

More Easy Solar Kit can be connected together to form a whole system. Take out the end cable of the second Easy Solar Kit. Connect the two sides of Extension Cable to the first and second microinverter.




Figure Connect the Extension Cable

Step 8. Start the System

Insert the plug to the socket and the system will start producing power after about a two-minute waiting time.

TSUNESS Co., Ltd.

Tel: +86-573-8466 8569

E-mail: sales@tsun-ess.com | www.tsun-ess.com

Add: Building E1, No. 555, Chuangye Road, Dayun Town, Jiashan County, Jiaxing City, Zhejiang Province, China